MASTER

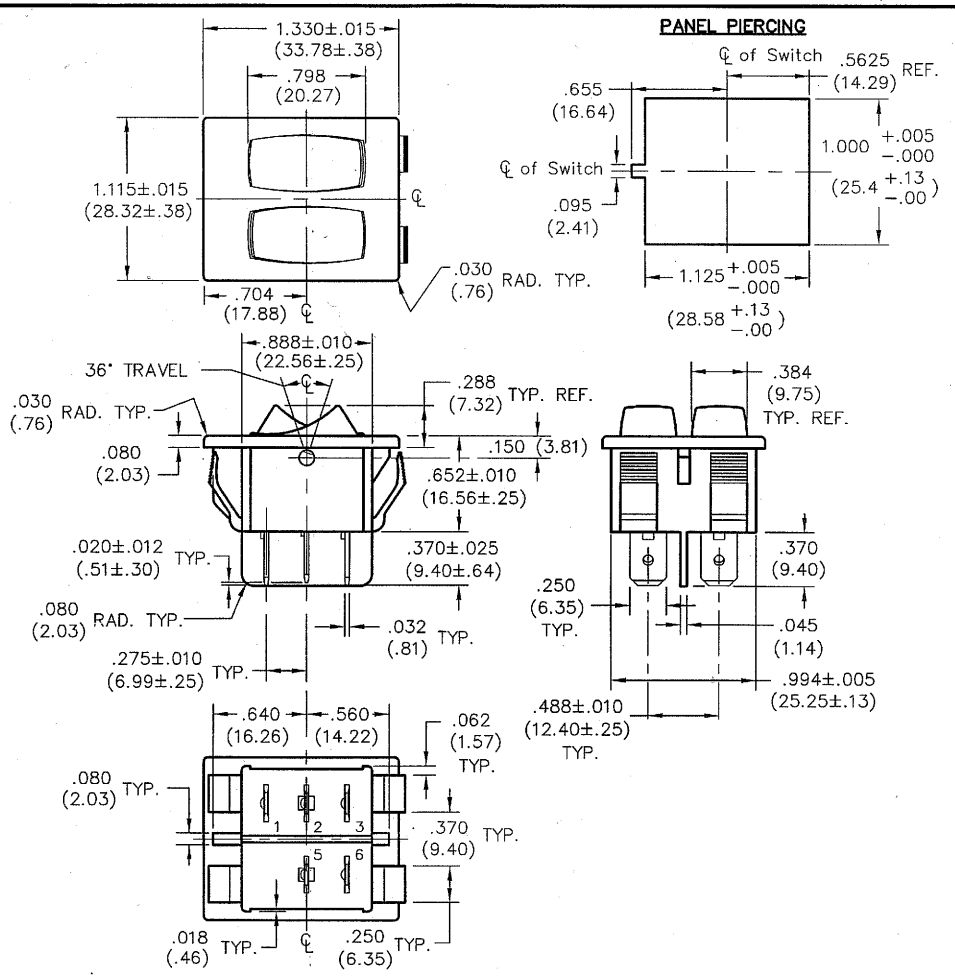

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING .....

Dwg. No.
GRSN-5021-1601

RATINGS:

16A. 125V.A.C. 12A. 250V.A.C.
3/4 H.P. 125–250V.A.C.

OPERATING TEMERATURE/HUMIDITY: −30C − 85C/100 Hour Soak @ 95% RH and 50C and 1 Hour dry in ambient = > 10 M ohms

ELECTRICAL CYCLES: UL Rated 6K Cycles, VDE 10K Cycles

MECHANICAL CYCLES: 100K Cycles

FLAMMABILITY RATING: UL 94V − 2

REGULATORY APPROVALS: UL 1054/CSA C22.2 No. 55

SCHEMATIC



REVISIONS		
0	RELEASED. DGW 3-11-2002	
1	ADDED RATINGS TO DRAWING. DGW 10-26-2009	GG OCT 26 2009

FORM-B4

PDF File Made

CW INDUSTRIES
Southampton, Pa. 18966

TOLERANCES UNLESS OTHERWISE SPECIFIED	
2 Place Decimal ±.010	METRIC
3 Place Decimal ±.005	1 Place Dec. ±.25mm
Angles ..... ±1°	2 Place Dec. ±.13mm

Made for: CW IND.
Drawn by: DGW 3-11-2002
Checked by: G. Guld 3-13-02
Approval: G. Guld 3/13/02

Title: DUAL ROCKER SWITCH ASSEMBLY POLARIZED

Division: SWITCH

Dwg. No. GRSN-5021-1601